


GAREX

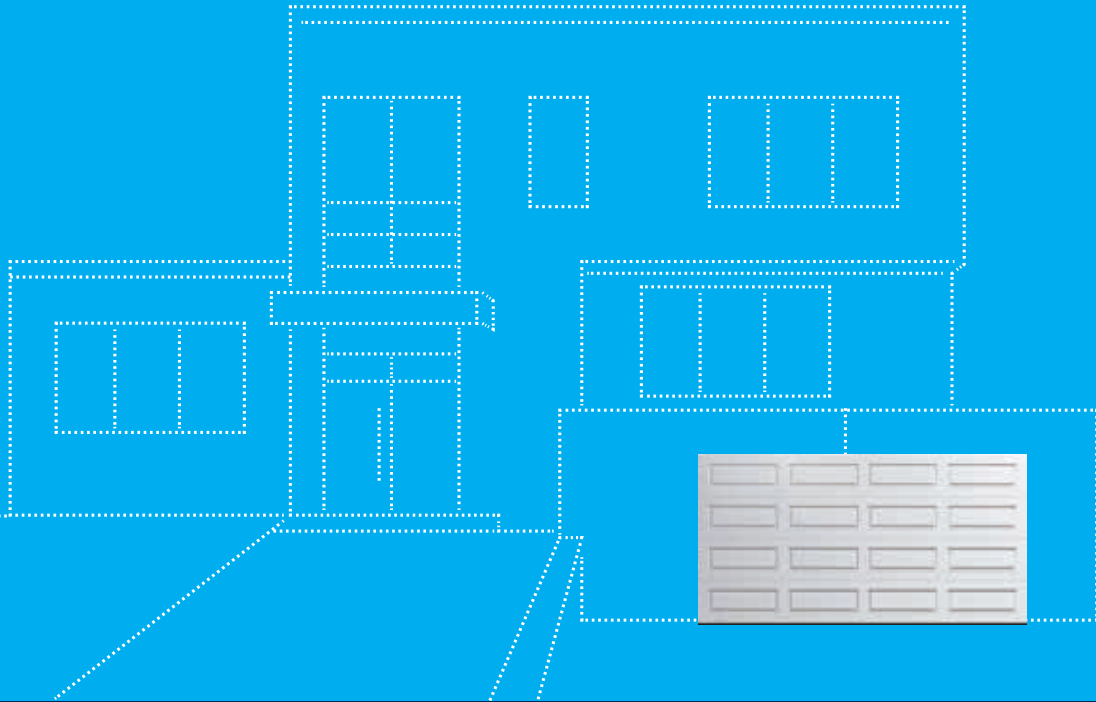

RESIDENTIAL **GARAGE DOORS**

WELL DESIGNED.
EASILY CUSTOMIZED.
QUICK TO INSTALL.

PERFORMANCE MADE SIMPLE






DESIGNED FOR REAL LIFE

Our garage doors deliver the goods in daily life. Smooth, trouble-free operation.

ENERGY EFFICIENCY.
DURABILITY.



R16



R12



NON-INSULATED




ALWAYS AVAILABLE FAST

WE DELIVER IN 5 TO 10 DAYS*

A very long order lead time?
Not here!

Talk to your dealer for details.

* For standard models and according to the delivery route.

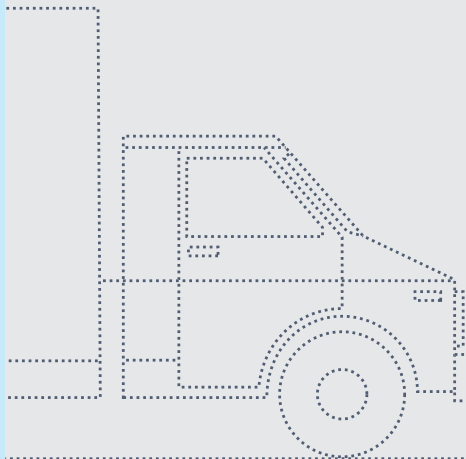

SATISFACTION MADE EASY


IMPECCABLE INSTALLATION

Treat yourself to peace of mind!

Our highly trained installers and easy-to-install garage doors deliver instant satisfaction that sticks around!

FIND A DEALER NEAR YOU:

garexdoors.com/en/find-a-dealer

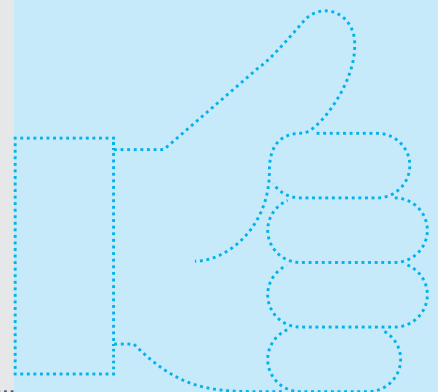

STYLES



CONTEMPORARY

Contemporary garage doors give you lots of windows, a streamlined look, and a variety of finishes perfect for modern and contemporary homes.

Illustrated model: Urban



TRADITIONAL

Classic elegance and restraint. Traditional insulated garage doors are easily customized and go with a wide range of architectural styles.

Illustrated model: Premium



CARRIAGE HOUSE

Our insulated garage doors bring out the character of country-style homes, enhancing their appeal without compromising their authenticity.

Illustrated model: New Hampshire

RESIDENTIAL GARAGE DOORS

PREMIUM | **R12** | **R16**



PANORAMIC



URBAN MR | **R12** | **R16**



PREMIUM SELECT MX | **R16**



QUANTUM | **R16**



GROOVED | **R12** | **R16**



PREMIUM SELECT XL | **R16**



WOODGRAIN | **R12** | **R16**



VERMONT | **R12** | **R16**



SEIGNEURIE HERITAGE | **R16**



URBAN | **R12** | **R16**



NEW HAMPSHIRE | **R12** | **R16**




SEIGNEURIE COLLECTION | **R16**



COMPONENTS



1 3/4" INSULATED R-16 STEEL OR ALUMINUM GARAGE DOORS

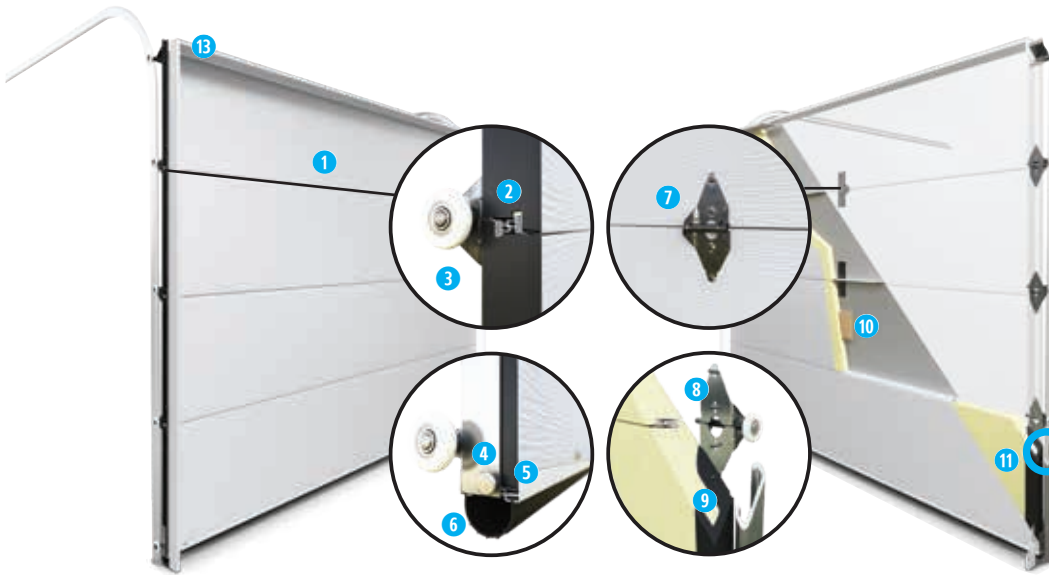

LONGER LASTING. TOUGHER.

Composite end blocks, a **Garex exclusive**

Composite end blocks make our insulated garage doors the longest-lasting on the market. It's a Garex exclusive that lets you say goodbye to wood rot.

1 METALLIC PANEL

Insulation: RSI 2.81 (R-16) polyurethane foam insulation pressure-injected between the interior/exterior faces to create a light and strong composite panel


COATING DESCRIPTION

STEEL

- Baked paint (2 layers)
- Primer
- Galvanization
- Steel
- Galvanization
- Primer

ALUMINUM

- Baked paint (2 layers)
- Primer
- Chromate pretreatment
- Aluminum
- Chromate pretreatment
- Primer



2 WEATHERSTRIP AND JOINT SEAL

Provide complete watertightness. No air circulation between the panel sections, **eliminating thermal bridges**. Minimize the amount of potential heat transfer between the inside and outside of your garage. The composite end blocks and inset weatherstripping eliminate all direct contact with interior and exterior metal cladding. That means the two metal walls are completely insulated from each other.



3 ROLLERS

White nylon rollers with ball bearings.

4 BOTTOM BRACKETS

14 ga (0,075") galvanized steel.

5 BOTTOM RETAINER

Ultra-resistant white PVC for weatherstripping insertion.

6 WEATHERSTRIP

"U" Flexible rubber inserted into a PVC reinforced Moulding offering a tightly sealed fit to the floor.

7 FULL-HINGE

14-gauge at the center.

8 FULL-HINGES

14-gauge at the end.

9 COMPOSITE END-BLOCK

Extruded polystyrene XPS end block: an exclusivity of GAREX.

10 WOOD PLATE

Optional for centre lock reinforcement.

11 POLYURETHANE

Polyurethane foam insulation pressure-injected.

12 TRACKS

12" standard radius, 14 ga (0,075") galvanized steel. Reinforcement on horizontal rails for doors 13' and over.

13 WEATHERSTRIP

High-performance weatherstripping ensuring increased weathertightness and stays flexible through the coldest temperatures.

COMPONENTS




1 3/8" INSULATED R-12 STEEL GARAGE DOORS

- 1 STEEL PANEL 2 WEATHERSTRIP AND JOINT SEAL
- 3 BLACK NYLON ROLLERS (WITHOUT BALL BEARINGS)
- 4 BOTTOM BRACKETS 5 BOTTOM RETAINER
- 6 WEATHERSTRIP 7 HALF-HINGE 14 GA 8 FULL-HINGE 18 GA
- 9 WOOD END-BLOCK 10 OPTIONAL WOOD PLATE
- 11 POLYURETHANE 12 HORIZONTAL RIVETED 16 GA OR STANDARD WELDED 14 GA TRACKS 13 WEATHERSTRIP


LAYOUTS

CONTEMPORARY STYLE




alloy 6063-T5
\$\$\$\$\$ 4.5

PANORAMIC



Door from 8' to 9'



Door from 9' to 12' 2"




Door from 12' to 16' 2"

The position of vertical mullions and the height of glass sections can be modified to fit the desired architectural aspect.

TRADITIONAL STYLE




steel \$\$\$\$\$ 2.0 | aluminum \$\$\$\$\$ 2.25



PREMIUM




steel \$\$\$\$\$ 2.5 | aluminum \$\$\$\$\$ 2.75

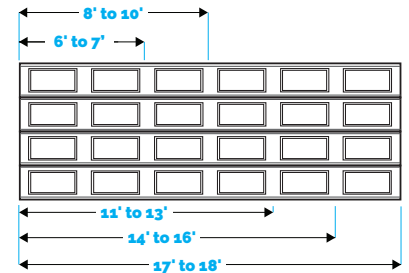


steel \$\$\$\$\$ 2.5 | aluminum \$\$\$\$\$ 2.75


PREMIUM SELECT MX-R




PREMIUM SELECT MX-B



PREMIUM SELECT MX



PREMIUM SELECT MX

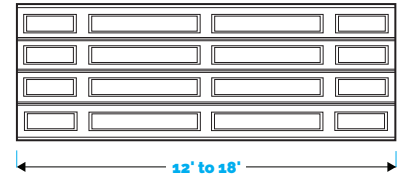

CARRIAGE HOUSE STYLE



steel \$\$\$\$\$ 4.0

SEIGNEURIE COLLECTION




PORT ROYAL



TILLY



MONTARVILLE




EXTENDED VILLERAY




UNIFORM VILLERAY




COMPACT VILLERAY



MITIS



GODEFROY



LOTBINIERE

DECORATIVE BOARDS



The decorative boards can be White or color matched, except for Dark Oak.

OPTIONAL DECORATIVE IRONWORK



SPADE



COLONIAL



SPEAR



FLEUR DE LYS



ARROW



CONIFER



ASPEN


LAYOUTS

CONTEMPORARY STYLE



steel
\$\$\$\$\$ 3.0

QUANTUM




steel
\$\$\$\$\$ 2.0



aluminum
\$\$\$\$\$ 2.25

WOODGRAIN

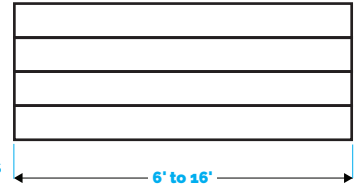


steel
\$\$\$\$\$ 2.0



aluminum
\$\$\$\$\$ 2.25

URBAN MR

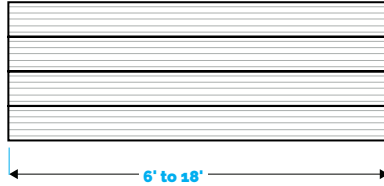


steel
\$\$\$\$\$ 2.0



aluminum
\$\$\$\$\$ 2.25

URBAN

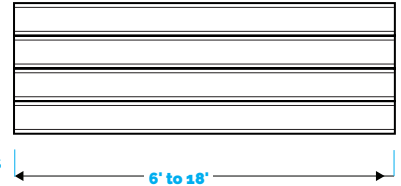


TRADITIONAL STYLE



steel
\$\$\$\$\$ 2.5

aluminum
\$\$\$\$\$ 2.75

PREMIUM SELECT XL

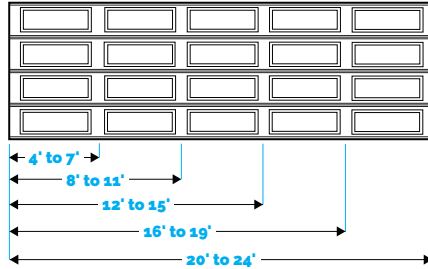


steel
\$\$\$\$\$ 2.0




aluminum
\$\$\$\$\$ 2.25

GROOVED

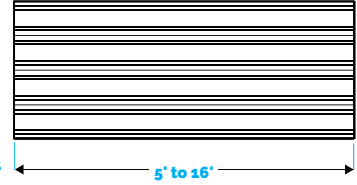

steel
\$\$\$\$\$ 3.5

SEIGNEURIE HERITAGE




The maximum size of the applied moulding is 72" widths.

CARRIAGE HOUSE STYLE



steel
\$\$\$\$\$ 2.0


aluminum
\$\$\$\$\$ 2.25




VERMONT



steel
\$\$\$\$\$ 2.5



aluminum
\$\$\$\$\$ 2.75

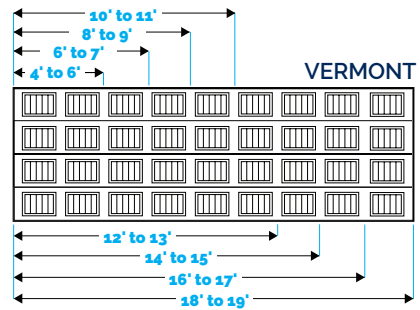


VERMONT



steel
\$\$\$\$\$ 2.0


aluminum
\$\$\$\$\$ 2.25




NEW HAMPSHIRE



steel
\$\$\$\$\$ 2.5



aluminum
\$\$\$\$\$ 2.75

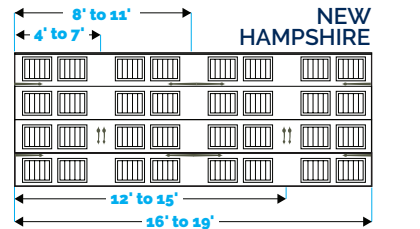

NEW HAMPSHIRE

WINDOWS

GAREX offers a great variety of windows for your garage door. Whatever your tastes might be, you will find the model that will suit your property.

As a perfect complement to the architectural style of your home, GAREX also supplies custom designed windows.

EXAMPLES OF WINDOWS AVAILABLE.

DECORATIVE WINDOWS | DOORS 1³/₄" R-16

24" x 12" OR 40" x 13"



4 SQUARE WINDOW



HEAD WINDOW



8 SQUARE WINDOW



4 SQUARE DIAMOND WINDOW



SUNBURST WINDOW



CONTOUR WINDOW



ARCHED WINDOW

Several configurations of shapes and types of grills such as Georgian, rectangular and tubular are available.

DECORATIVE WINDOWS | DOORS 1³/₈" R-12

PREMIUM AND VERMONT 20" x 14"



FRONT FRAME STOCKTON PRAIRIE WAGON WHEEL



SUNBURST - 4 PIECE *

* Also available in 5, 6, 7, and 8 piece SUNBURST.

NEW HAMPSHIRE 43" x 16"



STOCKTON 4 SQ STOCKTON 8 SQ PRAIRIE WATERTON



STOCKBRIDGE CASCADE CATHEDRAL WAGON WHEEL *



ARCHED STOCKBRIDGE ARCHED STOCKTON




4 PIECE SUNBURST

* Also available in 2 piece WAGON WHEEL.

GLASSES

A wide range of glass* such as clear, satin/frosted, pinehead, and many others are available.

Also different shade and degree of shades as gray, supergray, and others are available according to the thickness of the glass.

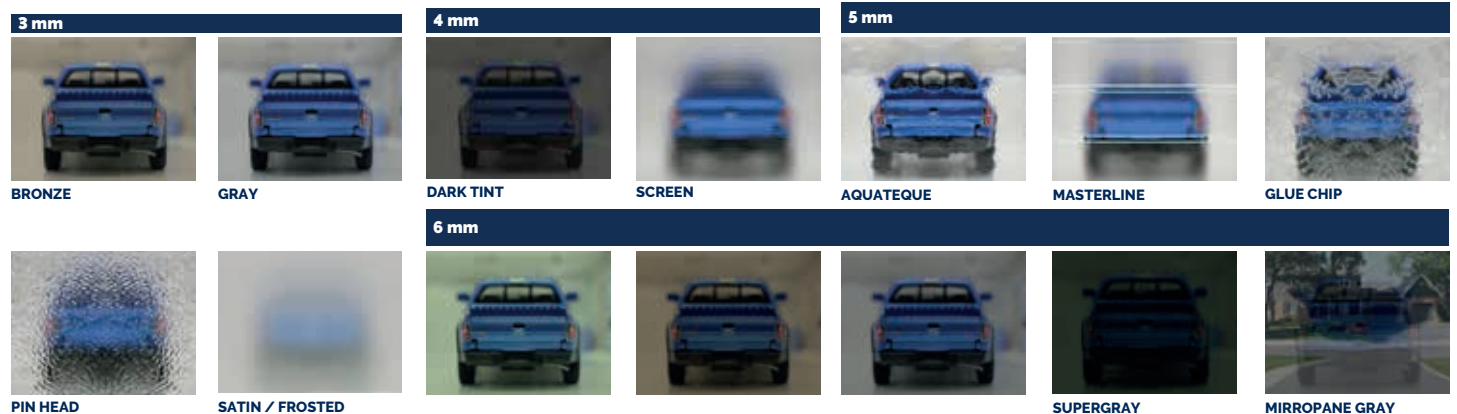

* Shades shown may differ from the actual shades of glasses. Several other choice of glasses available. Ask your Garex dealer!

COLORS

INSULATED STEEL DOOR COLORS*



Possibility of a door with personalized colors

The GAREX selection of colors is from oven-baked polyester based paints that meet high quality standards and containing, in some cases, a solar radiation reflective coating agent. An effective way to reduce heat gains from solar radiation.

INSULATED ALUMINUM DOOR COLORS*



PANORAMIC DOOR FRAMES COLORS**



* Colors shown may differ from the actual colors of the doors. Get free color samples from authorized distributors.

** Other colors available upon request.

OPENING MECHANISMS CONFIGURATIONS


GAREX doors will fabricate, on demand, the opening mechanism adapted to any available space configuration.



STANDARD



SLOPED ROOF

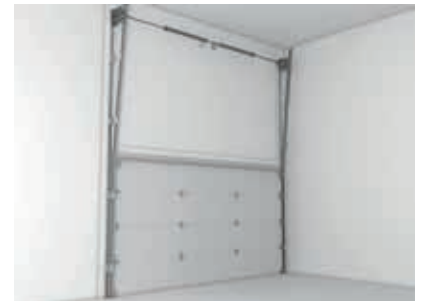

FULL VERTICAL LIFT



HIGH LIFT



LOW HEADROOM

* Subject to certain limitations on the opening mechanism due to the door weight.

GAR**EX**

JUST THE WAY YOU WANT




Illustrated model: Urban MR

EXTENSIVE CUSTOMIZATION OPTIONS

Our user-friendly customization tools make it easy to give your property a personal touch.

CUSTOMIZE YOUR GARAGE DOOR:
garexdoors.com/en/design-center



TECHNICAL INFORMATION

Panoramic

WIDTH	8' to 16,2' (2,44 m to 4,88 m)
DOOR THICKNESS	1¾" (44,45 mm)
FRAME TYPE	Alloy 6063 – T5
MULLION WIDTH	1,6" (40,63 mm)
INSULATION FACTOR	Non-Insulated
THERMOS THICKNESS	0,748" (19 mm)
COLOR	White, Clear Anodized, Black
TEXTURE	Smooth Aluminum Extrusion
MODELS	Equal Width Openings
	1/3 - 2/3
	2/3 - 1/3
	1/4 - 1/2 - 1/4
	1/5 - 1/5 - 1/5 - 1/5
GLASS THICKNESS	3 mm , 4 mm, 5 mm and 6 mm
WARRANTY	Lifetime warranty*

The location of the vertical mullions and the height of the glass panels can be customized to fit your architectural look.

OTHER INFORMATION

Continuous weatherstripping to assure optimal sealing between sections
Integrated reinforcement for 14' doors and over
Reinforced extremity for double hinges for 14' doors and over
Double top and bottom for 15' doors and over
Aluminum of 1,73 mm (0,068") to 3,45 mm (0,136") thick where accessories can be installed
Triple-layered polycarbonate 16 mm (0,629") - 2,69 kg /m2 (0,553 lb/pi²)

MAXIMUM GLASS WIDTH

3 mm (STANDARD)	Up to 50" (1270 mm)
4 mm	Up to 65" (1651 mm)
5 mm	Up to 128" (3251 mm)
6 mm	Up to 100" (2540 mm)

R12

WIDTH	5' to 16' (1,52 m to 4,88 m)
PANEL THICKNESS	1¾" (34,93 mm)
METAL THICKNESS	26 gauge Galvanized steel
INSULATION	23 gauge Aluminum
INSULATION FACTOR	High density polyurethane foam
INSULATION DENSITY	RSI 2,11 (R12)
INSULATION DENSITY	2,5 lb/pi (40 kg/m)
INTERIOR PLATES	18 Gauge, for half-hinge
END BLOCK	White 138 painted wood end block
PAINT	Oven-baked polyester based
COLOR	White 138, Black, White (Alu. only)
TEXTURE	Woodgrain texture
WEIGHT	1,65 lb/pi² (8,06 kg/m²)
EMBOSSMENT	Woodgrain Grooved
	Urban Vermont 20" X 14"
	Urban MR Premium 20" X 14"
	New-Hampshire 20" X 14"
	grouped by 2, 43" X 16"
WARRANTY	Lifetime warranty*

CONFIGURATIONS

	VALUE-PACK	STANDARD
PRICE	\$\$\$\$	\$\$\$\$
TRACKS	16 ga Riveted	14 ga Standard Welded
ROLLERS	Black Nylon Rollers (without ball bearings)	Black Nylon Rollers (without ball bearings)
WEATHERSTRIPPING	PVC White nail on Single Blade	PVC White Double Blade
1/2 HINGE (at the center)	14 ga	14 ga
FULL HINGE (at the end)	18 ga	18 ga
BOTTOM RETAINER	White PVC with "U" Rubber 2-1/2"	White PVC with "U" Rubber 2-1/2"

OPTIONS

Adjustable Bracket for Operator 18" - 24"
Barlock Outside Mounting Plate
Double Hinges
Barlock 8' to 10'
Barlock 12' to 16'
Cable Lock
Clear, Single or Double-Pane (Thermopane) Glass
Top Aluminum Moulding with Reinforcement *
Reinforcement Mounting Plate for 14' Doors and Over

*Required when a window is located on top panel.

Quantum - R16

WIDTH	6' to 16' (1,82 m to 4,88 m)
PANEL THICKNESS	1¾" (44,45 mm)
METAL THICKNESS	Galvanized steel 20 gauge (0,89 mm - 0,035 po)
INSULATION	High density polyurethane foam
INSULATION FACTOR	RSI 2,81 (R16)
INSULATION DENSITY	2,5 lb/pi (40 kg/m)
INTERIOR PLATES	14 Gauge, for full hinge
END BLOCK	Composite, an exclusivity of GAREX
PAINT	Baked paint (2 layers)
COLOR	White
TEXTURE	Smooth
WEIGHT	3,37 lb/pi² (16,45 kg/m²)
EMBOSSMENT	Smooth
	Smooth with 4 grooves
WARRANTY	Lifetime warranty*

Steel - R16

WIDTH	4' to 16' (1,22 m to 4,88 m)
PANEL THICKNESS	1¾" (44,45 mm)
METAL THICKNESS	Galvanized steel 26 gauge (0,40 mm - 0,0175 po)
INSULATION	High density polyurethane foam
INSULATION FACTOR	RSI 2,81 (R16)
INSULATION DENSITY	2,5 lb/pi (40 kg/m)
INTERIOR PLATES	14 Gauge, for full hinge
END BLOCK	Composite, an exclusivity of GAREX
PAINT	Baked paint (2 layers)
COLOR	White Black Commercial Brown Slate Sand Dark Oak Silver Pebble
TEXTURE	Woodgrain
WEIGHT	1,9 lb/pi² (9,28 kg/m²)
EMBOSSMENT	Woodgrain Grooved
	Embossed
WARRANTY	Lifetime warranty*

Aluminum - R16

WIDTH	4' to 16' (1,22 m to 4,88 m)
PANEL THICKNESS	1¾" (44,45 mm)
METAL THICKNESS	23 Gauge (0,61 mm - 0,024 po)
INSULATION	High density polyurethane foam
INSULATION FACTOR	RSI 2,81 (R16)
INSULATION DENSITY	2,5 lb/pi (40 kg/m)
INTERIOR PLATES	14 Gauge, for full hinge
END BLOCK	Composite, an exclusivity of GAREX
PAINT	Baked paint (2 layers)
COLOR	White Gray
TEXTURE	Woodgrain
WEIGHT	1,3 lb/pi² (6,35 kg/m²)
EMBOSSMENT	Woodgrain Grooved
	Embossed
WARRANTY	Lifetime warranty*

* For warranty conditions and exclusions consult our website garexdoors.com



YOUR GAREX DISTRIBUTOR

QUEBEC

610, Principale St
Val-Alain (QC)
G0S 3H0

T. 1 800 748-3317

F. 1 877 744-3443

info@garex.ca
garexdoors.com

MONTREAL

10020, Mirabeau St
Anjou (QC)
H1J 1T6

NEW-BRUNSWICK

62, Saint-André Rd
Saint-André (NB)
E3Y 3S9

