

SPEED-TITE™ Features

- High speed doors for use wherever speed & security are required
- Springless design maximizes uptime
- Faster cycles reduce energy costs and increase productivity




Alpine's Speed-Tite™ doors are used for loading docks, warehouses, shipping and receiving platforms, car dealerships, parking garages, fire houses, and anywhere fast acting doors are required.

Functional Benefits

- Alpine's Speed-Tite™ high performance rolling steel doors are fully weather sealed, providing protection against the harshest weather conditions
- Speed-Tite's variable frequency operator allows for increased speeds (24" up, 12" down average) and increased longevity with soft start/stop features
- No sprocket or chain, which tend to wear over time
- Static and operational windloads are available
- Standard safety and entrapment features include light curtains and photo eyes
- Warrantied up to 300,000 cycles or 2 years
- Vision lights: 6' x 1-1/2" glazed panels available spaced 12" on center
- Optional monitored sensing edge
- Optional breakaway bottom bar and extended (overwrapped) curtain allow you to keep your door running in the event of damage to the door. The slat height is extended either 3' or 6' taller than required, with these additional slats remaining under the hood. In the event of damage to the lower part of the curtain, the bottom bar will break away allowing the damaged slats to be removed. The extended part will then "move down" to the exposed area of the curtain.

SPEED-TITE™

HIGH PERFORMANCE ROLLING STEEL DOOR

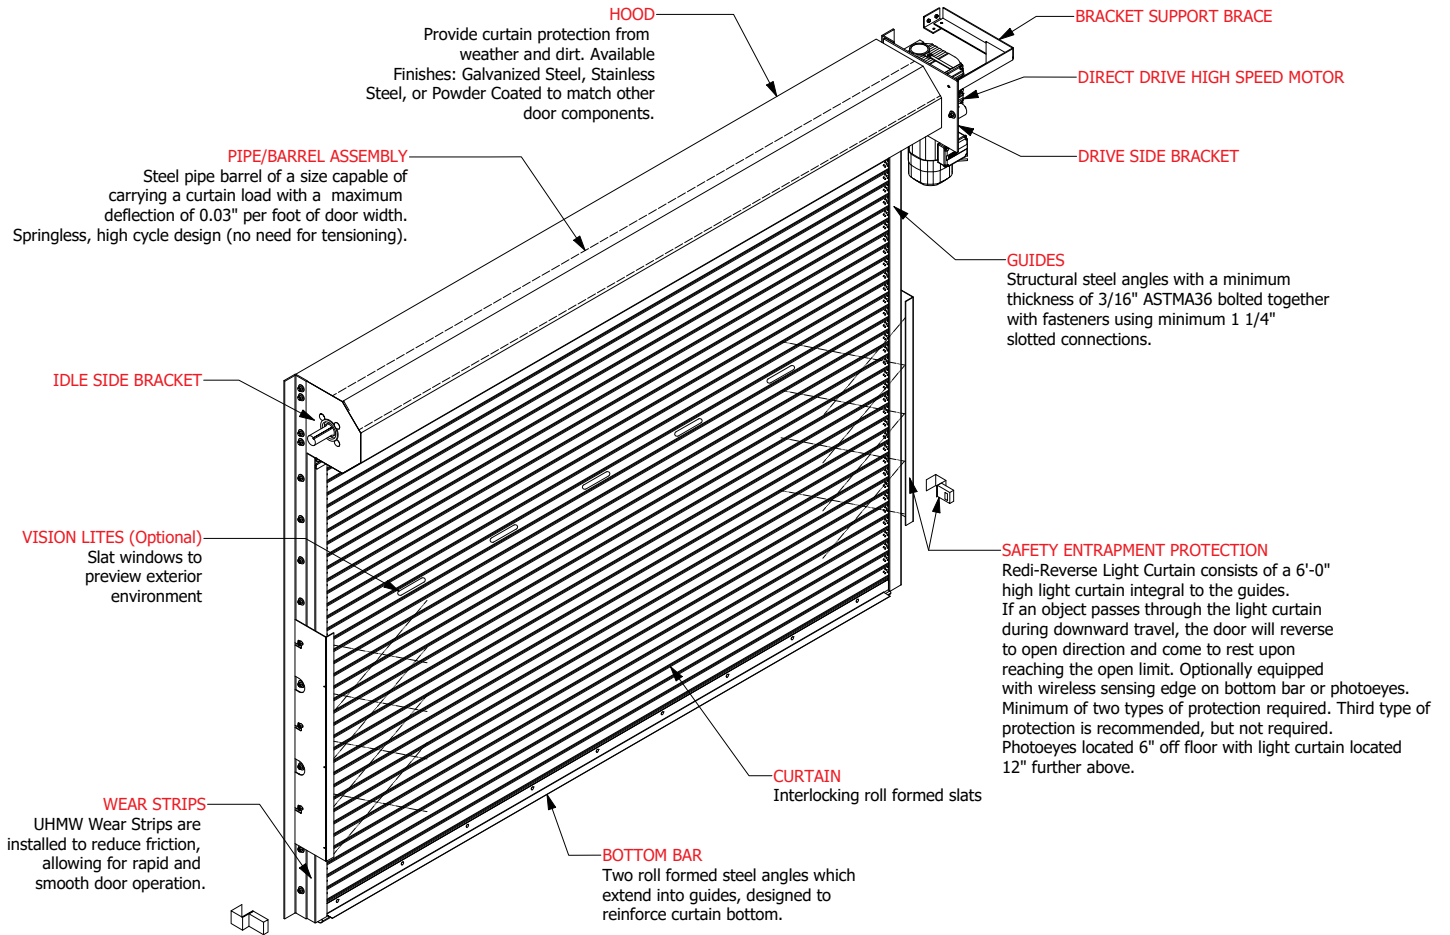

Operational Requirements

- Motor operation with auxiliary hand chain in the event of a power outage

Optional Materials and Finishes

- Galvanized, Stainless Steel or Pre-Painted
- Exo-Shield™ LCF powder coating is available with the option for special effects textures, custom colors and environmental requirements; low coefficient friction wear resistance for long lasting color quality

Product Selection Guide

More Economical



More Protection

