

Wind-Tite® Features


- Full perimeter weather stripping
- Internal hood baffle prevents weather infiltration through the header
- Ideal for specialty projects requiring doors in excess of 60'0" in width



Alpine's Wind-Tite® warehouse door is used for store fronts, loading docks, warehouses, shipping and receiving platforms, aircraft hangars, military platforms and specialty applications.

Functional Benefits

- 2.75" flat slats available in 24ga minimum with options for 22, 20, 18 or 16 gauges
- Strong and effective against high wind loads. Consult factory for capacity.
- Doors can be manual push up, hand crank, hand chain or motor operated. All operators can be adapted to specific conditions.
- Ideal for specialty projects requiring doors up to and exceeding 60'0" in width
- Provides protection against high wind, weather penetration and other inclement weather conditions
- Can be installed on the interior, exterior, face of wall or between jambs

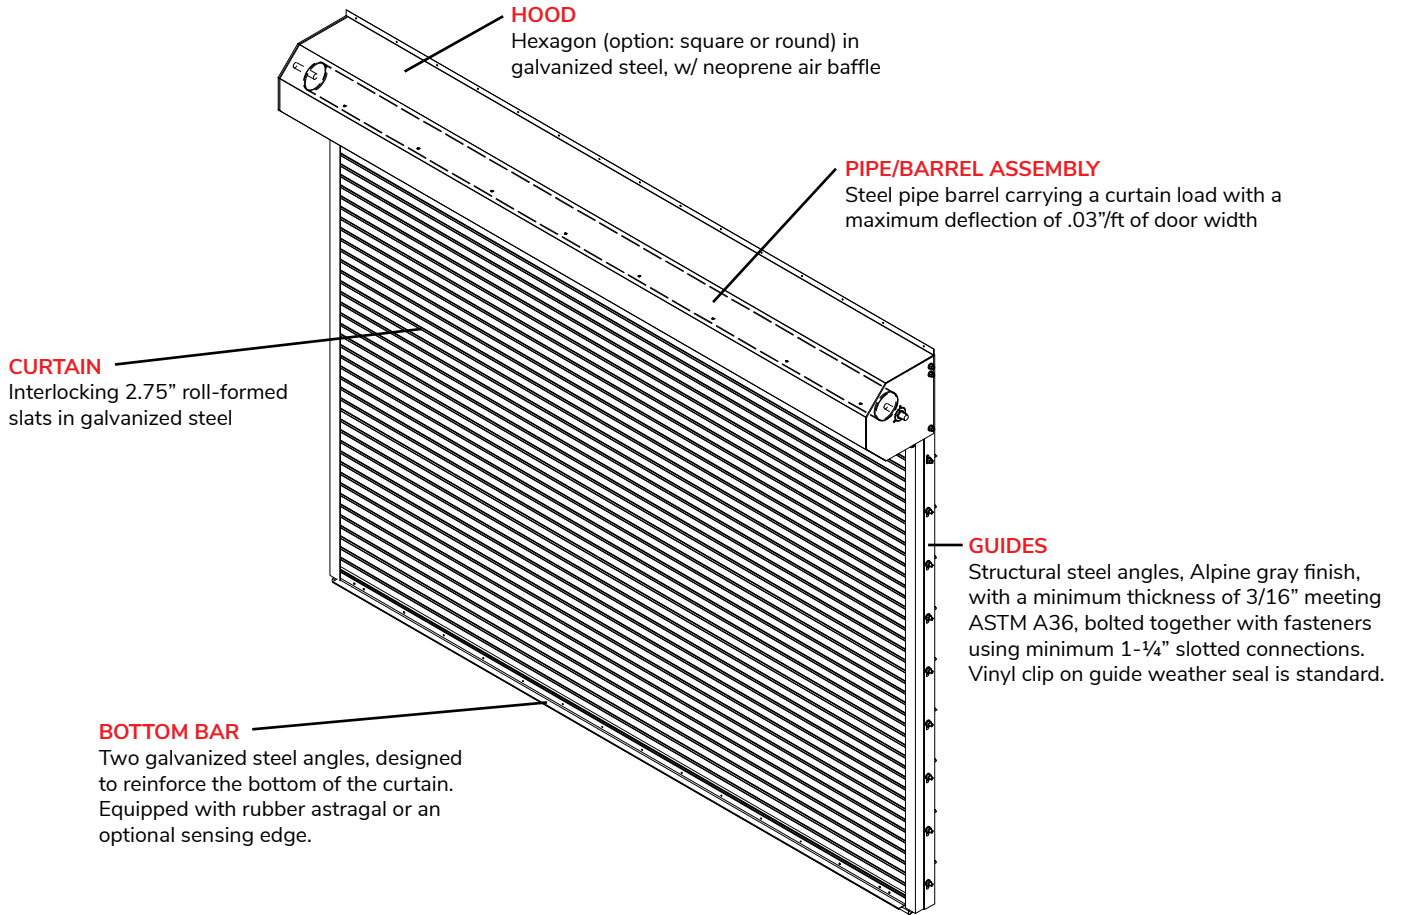

Operational Requirements

- Choice of push-up, hand chain, removable awning type crank, or motor operation

Optional Materials and Finishes

- Material Options: Stainless Steel or Aluminum
- Finish Options: Tan, White or Grey; or ExoShield™ Powder Coating.

Product Selection Guide

More Economical

Better Performance

